


GWT + BS + GWSP-EPDM COMBI

Combination suitable for processing with GuardianWeld system.

Innovative induction welding device for fastening synthetic roof membranes

- Combination suitable for steel deck + EPDM roofing membrane
- High tech, robust induction welding machine
- No penetration of the roofing membrane
- Ergonomic working: upright, light in weight
- No insulation fasteners are required

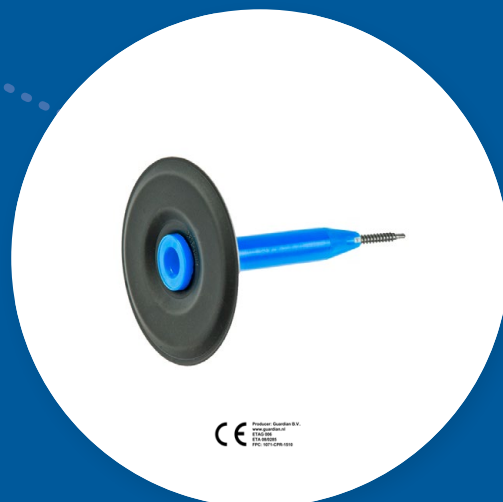

Products

PRODUCT CODE	TUBE/SCREW Ø MM X LENGTH MM	MAXIMUM BUILDING THICKNESS	PACKAGING
On request	GWT+BS/ISO080, 23 X 060 / 6,1 X 080 + GWSP-PVC	80 mm	250/Box
On request	GWT+BS/ISO090, 23 X 060 / 6,1 X 080 + GWSP-PVC	90 mm	250/Box
On request	GWT+BS/ISO100, 23 X 080 / 6,1 X 080 + GWSP-PVC	100 mm	250/Box
On request	GWT+BS/ISO110, 23 X 080 / 6,1 X 080 + GWSP-PVC	110 mm	250/Box
On request	GWT+BS/ISO120, 23 X 80 / 6,1 X 100 + GWSP-PVC	120 mm	250/Box
On request	GWT+BS/ISO130, 23 X 80 / 6,1 X 100 + GWSP-PVC	130 mm	250/Box
On request	GWT+BS/ISO140, 23 X 120 / 6,1 X 080 + GWSP-PVC	140 mm	250/Box
On request	GWT+BS/ISO150, 23 X 120 / 6,1 X 080 + GWSP-PVC	150 mm	250/Box
On request	GWT+BS/ISO160, 23 X 120 / 6,1 X 100 + GWSP-PVC	160 mm	250/Box
On request	GWT+BS/ISO170, 23 X 150 / 6,1 X 080 + GWSP-PVC	170 mm	250/Box
On request	GWT+BS/ISO180, 23 X 150 / 6,1 X 080 + GWSP-PVC	180 mm	250/Box
On request	GWT+BS/ISO190, 23 X 150 / 6,1 X 100 + GWSP-PVC	190 mm	250/Box
On request	GWT+BS/ISO200, 23 X 180 / 6,1 X 080 + GWSP-PVC	200 mm	250/Box
On request	GWT+BS/ISO210, 23 X 180 / 6,1 X 080 + GWSP-PVC	210 mm	250/Box
On request	GWT+BS/ISO220, 23 X 180 / 6,1 X 100 + GWSP-PVC	220 mm	250/Box
On request	GWT+BS/ISO230, 23 X 180 / 6,1 X 100 + GWSP-PVC	230 mm	250/Box

PRODUCT CODE	TUBE/SCREW Ø MM X LENGTH MM	MAXIMUM BUILDING THICKNESS	PACKAGING
On request	GWT+BS/ISO240, 23 X 180 / 6,1 X 120 + GWSP-PVC	240 mm	250/Box
On request	GWT+BS/ISO250, 23 X 180 / 6,1 X 120 + GWSP-PVC	250 mm	250/Box
On request	GWT+BS/ISO260, 23 X 240 / 6,1 X 080 + GWSP-PVC	260 mm	250/Box
On request	GWT+BS/ISO270, 23 X 240 / 6,1 X 080 + GWSP-PVC	270 mm	250/Box
On request	GWT+BS/ISO280, 23 X 240 / 6,1 X 100 + GWSP-PVC	280 mm	250/Box
On request	GWT+BS/ISO290, 23 X 240 / 6,1 X 100 + GWSP-PVC	290 mm	250/Box
On request	GWT+BS/ISO300, 23 X 240 / 6,1 X 120 + GWSP-PVC	300 mm	250/Box

Associated products




BS 6,1

For use with BIT-T25
TX-25 head
Ø 6,1 mm



GWT (FM Approval)

Modified PA
Size Ø 23
Sintef approval 2516



GWSP 80 (FM Approval)

Metalic-pink coating for PVC
Yellow coating for TPO
Black coating for EPDM



GWT

High-tech robust induction tool
No penetration of the membrane
Fastening independent of
membrane joints