


DBT-S 4,8-A

Stainless steel drill point screw on belt suitable for use in steel roof (0.70 mm to 2 x 1.25 mm).

- For use with fully automatic tool IF 240
- 8 mm hexagonal head
- \varnothing 4,8 mm
- Length: 60 t/m 220 mm
- Required length: build up + 20 mm
- Thread under head for step security
- High-quality, protective coating, carbon steel, 15 cycles
- Sintef technical approval 2516
- ETA approval 08/0285

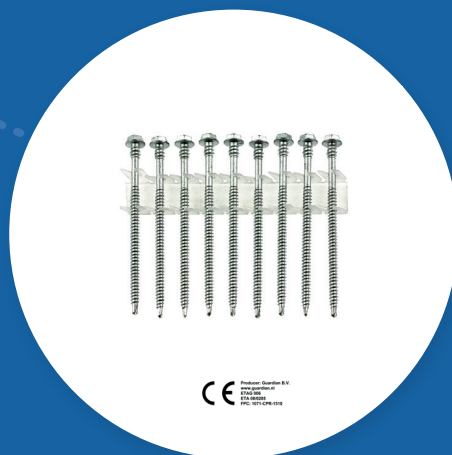

Products

PRODUCTCODE	\varnothing MM X LENGTH MM	PACKAGING
1480508	DBT-S-48120, 4,8 X 120	1050/Box
1480509	DBT-S-48140, 4,8 X 140	1050/Box
1480510	DBT-S-48160, 4,8 X 160	750/Box
1632855	DBT-S-48180, 4,8 X 180	750/Box
1632856	DBT-S-48200, 4,8 X 200	750/Box

Associated products



IF 240

Depth setting
User friendly
Ergonomic



SPA 8240 (FM Approval)

Sendzimir galvanised steel, 15
cycles Kesternich
Size 82 x 40 mm



SPA 7070

Sendzimir galvanised steel,
15 cycles Kesternich
Size 70 x 70 mm