


SP 40

Metal pressure plate for concrete and wood decks without insulation.

- Protective coating, 15 cycle Kesternich
- Size \varnothing 40 mm
- Thickness 1,0 mm
- Hole diameter: 6,50 mm
- Underside: flat and recessed
- Sintef approval 2516
- ETA approval 08/0285
- Also available as pressure plate with deep recess (SP-40-DD).
This pressure plate in combination with TS 5,2 wood screw is the ideal combination for fastening of roofing

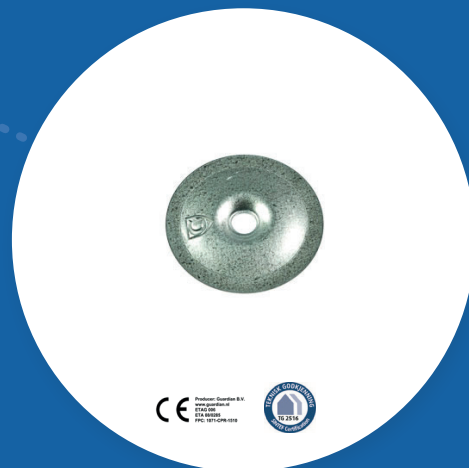



Products

PRODUCT CODE	DIMENSIONS / FLAT UNDERSIDE	PACKAGING
1486807	SP-40-F2, SP 40 X 1,0mm F2 \varnothing 6,50mm	1000/Bag

PRODUCT CODE	DIMENSIONS / DEEP DISH	PACKAGING
1486806	SP-40-D2, SP 40 X 1,0mm D2 \varnothing 6,50mm	1000/Bag

PRODUCT CODE	DIMENSIONS / DEEP DISH	PACKAGING
1368489	SP-40-LBS, SP 40 X 1,0mm LBS \varnothing 7,50mm	1000/Bag

Associated products

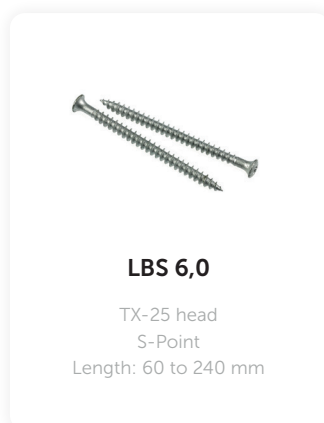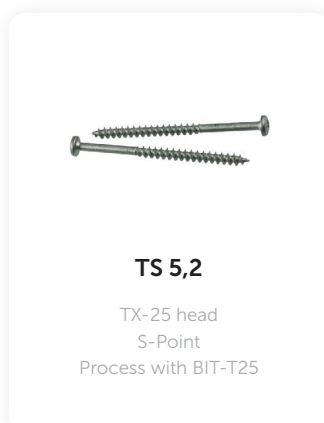


Technical drawing

SP-40-D



SP-40-F



Productmarking

D = deep dish
F = flat
S = standard